SS100

Compact plug-on RS-232 to RS-485/422 media converter



FEATURE HIGHLIGHTS

PRODUCT DESCRIPTION

The SS100/SS100SiS media converters provide complete signal conversion between RS-232 and RS-422/485, without requiring an external power source. It is a fast and efficient solution to overcome distance limitations of RS232 or for connecting to industrial devices with an RS422/RS485 interface. The converters support both half-duplex 2-wire RS-485 and full-duplex 4-wire RS-422/485, and you could select mode via DIP switch without extra software required. Automatic data direction control is provided for RS-485. In this case, the RS-485 driver is enabled automatically when the circuitry senses the TxD output from the RS-232 signal. This means that no programming effort is required to control the transmission direction of the RS-485 signal.

Port Power over RS232

The RS-232 port of the SS100/SS100SiS is a DB9 female socket that can connect directly to the host PC, using the RTS/DTR lines to receive the power needed to run. Regardless of whether the signal is high, the can obtain enough power from the data line. SS100-SiS, the version with isolation, still requires an external power supply. When there are many devices connected to RS422 or RS485 signal lines, we recommend that external power supply is necessary.

LED Port Power Indicator

It is easy to let the SS100 test the device for you. Simply connect the SS100 to the device's RS-232 port and set the RS485 Echo mode. If the power port LED indicator of PWR/Tx/RX lights up, then SS100 is receiving enough power and data communication is working properly.







SPECIFICATIONS

| Serial interface | | | | | |
|---------------------------|---------------------------------------------------------------------------------|--|--|--|--|
| Mode | RS422 : Point to point Mode, Multi-Drop Mode RS485: Echo Mode, Non-Echo Mode | | | | |
| Speed | 1200bps ~ 500Kbps | | | | |
| Maximum Distance | 1.2Km. @115.2Kbps, 24AWG twisted pair cable | | | | |
| Connector | RS232: DB9 female RS422/485: Terminal block 6P (DC-Jack would be 4P) | | | | |
| Data bits | 5, 6, 7, 8 | | | | |
| Stop bits | 1, 2 | | | | |
| Parity | None, even, odd, space, mark | | | | |
| Data control | Auto toggling | | | | |
| Termination Resistor | 120Ω, selectable via dip switch | | | | |
| Interface | | | | | |
| LEDs | Power, Tx, Rx | | | | |
| Power Requirements | Power Requirements | | | | |
| Power | Power supply via RS232 port (RTS, DTR), by TB or DC Jack | | | | |
| Power input | 5 VDC | | | | |
| Power consumption | Non-ISO 115mW Max, ISO 220mW Max | | | | |
| Physical Characteristics | | | | | |
| Housing | Plastic | | | | |
| Dimension | 33.8 x 76.4 x 17.5 mm | | | | |
| Weight | 21 g | | | | |
| Environmental Limits | | | | | |
| Operating Temperature | -40°C ~ 85°C (-40°F ~ 185°F) | | | | |
| Storage Temperature | -40°C ~ 85°C (-40°F ~ 185°F) | | | | |
| Ambient Relative Humidity | 5 to 95%, non-condensing | | | | |







REGULATORY APPROVALS


| Approvals | | | | | | | |
|----------------|----------------------------------------------------------------|------------------------------------|------------------------------------------------------------------------------------------------------------------------------|-------|------------------|--|--|
| EMC | EN55032/24, EN61000-6-4, EN61000-6-4, EN61000-3-2, EN61000-3-3 | | | | | | |
| EMI | FCC Part | FCC Part 15B Class A | | | | | |
| Test | ltem | | Value | Level | Criterion | | |
| IEC 61000-4-2 | ESD | Contact Discharge Air Discharge | | | B B | | |
| IEC 61000-4-3 | RS | 80-1000MHz | 10(V/m) | 3 | А | | |
| IEC 61000-4-4 | EFT | AC Power Port | ±2.0KV | 3 | В | | |
| IEC 61000-4-5 | Surge | AC Power Port | Line-to-Line±1.0KV | 3 | В | | |
| IEC 61000-4-6 | CS | 0.15-80MHz | 10 Vrms | 3 | А | | |
| IEC 61000-4-8 | PFMF | Enclosure | 30A/m (r.m.s) | 4 | А | | |
| IEC 61000-4-11 | DIP | AC Power Port | 1. >95% reduction, 1 period 2. 60% reduction, 10 period 3. 30% reduction, 25 periods 4. >95% reduction, 250 periods | - | A A A C | | |
| RoHS | Yes | | | | | | |
| MTBF | 25.29 years | | | | | | |
| Warranty | 5 years | | | | | | |







DIMENSIONS & LAYOUT

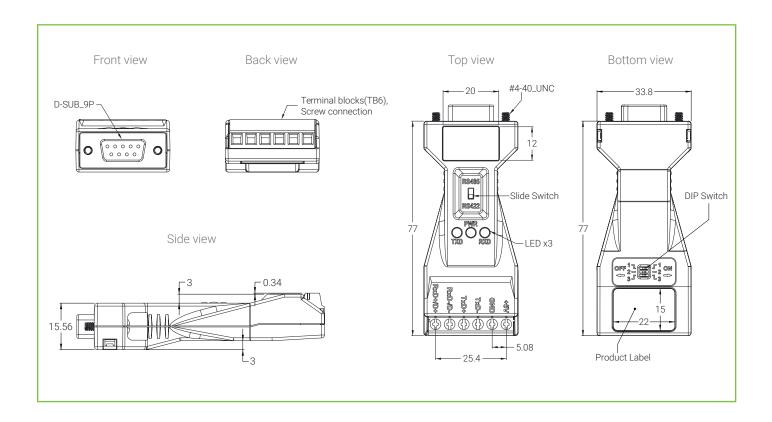

ORDERING INFORMATION

| Ordering Information | | | | | | |
|----------------------|-----------------|-------|-----------|-------------------|-----------------|--|
| Product | Part number | RS232 | RS422/485 | Isolation Voltage | Power Connector | |
| SS100 | 1P1SS100000001G | DB9 | TB-6 | N/A | TB-2 | |
| SS100-SiS-R | 1P1SS100000002G | DB9 | TB-6 | 3000 VDC at RS232 | TB-2 | |
| SS100-J | 1P1SS100000004G | DB9 | TB-4 | N/A | DC-Jack | |

| Optional Accessories | | | | |
|----------------------|-----------------|----------------------------------------------------------------------------------------------|--|--|
| Model Name | Part Number | Description | | |
| UV305-0510(US-DC) | 50500051500003G | DC jack (3.5/1.35/7.5 mm) power adapter, 100~240VAC input, 1.0A @ 5 VDC output, US plug, LV6 | | |
| UVE305-0510 (EU-DC) | 50500051500013G | DC jack (3.5/1.35/7.5 mm) power adapter, 100~240VAC input, 1.0A @ 5 VDC output, EU plug, LV6 | | |
| UVE305-0510(UK-DC) | 50500051500023G | DC jack (3.5/1.35/7.5 mm) power adapter, 100~240VAC input, 1.0A @ 5 VDC output, UK plug, LV6 | | |

